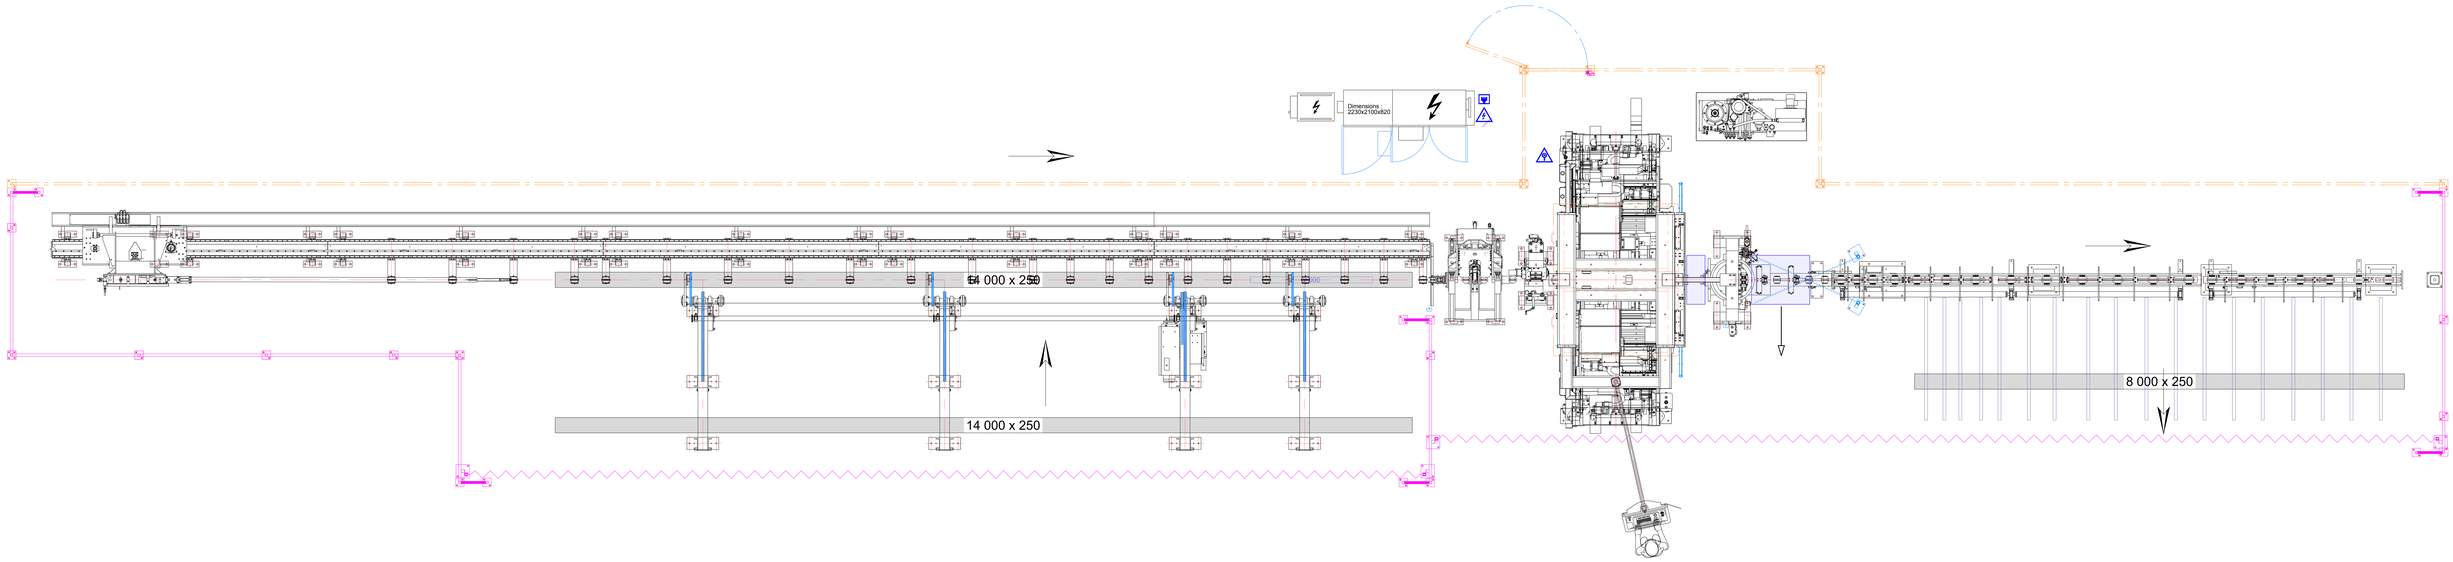

SAFETY LEGEND:

VERNET BEHRINGER SUPPLY:

- Safety fence, Height 120/1800 mm (Mesh size 40 x 40 mm).
- Safety fence kickstand
- Door safety contact
- Dual-beam immaterial fence Heights 300-800 mm
- Plate
- Raceways

CUSTOMER SUPPLY

- Safety fence, Height 120/1800 mm (Mesh size 40 x 40 mm).
- Door 1080 mm, Height 1800 mm (Mesh size 40 x 40 mm).
- Marking on the ground accompanying immaterial fences

WARNING:
CHAMFER ALL TROUGHS ANGLES WHICH CAN LEAD TO POWER CABLES SHEARING (CHAMFERS OF 150 AT 45°)

REMARKS OR ANNOTATIONS :

GROUND FASTENING

INPUT BENCH, LATERAL SYSTEMS, MACHINE BLOCK, OUTPUT BENCH, AS WELL AS SAFETY DEVICES WILL BE FASTENED TO THE GROUND TROUGH MECHANICAL ANCHORS FOR NON CRACKED CONCRETE :

M16/20 x 125, total quantity :-
M16/20 x 150, total quantity :-
(Type "HILTI HSA" or "RAWLPLUG R-XPT")
- TO BE SUPPLIED BY CUSTOMER -

GROUND QUALITY

GROUND FLATNESS TOLERANCE ± 15 MM, IN CASE OF UPPER DIFFERENCE, CONTACT US

CONCRETE MINI THICKNESS : 250 mm
CONCRETE QUALITY :
C20-25 acc. EN 206-1

SUPPLY

PNEUMATIC INLET
1m3/Hour pressure 6 bars or 6m3/h slack air at normal atmospheric pressure, length out of the ground : 2m

ELECTRIC INLET
400V±15V 3 phases + earth
- kVA , wire out of the ground : 2m.

Customer is liable for line protection:
- Overload / Overcurrent / Differential

Ethernet input,
wire out of the ground: 3m.

VP2X 250 12D

CUSTOMER

SCALE : 1/60 | CUSTOMER N°: - | WORKING LEVEL : 1100 mm

DESIGN INITIATIVE CAN BE MODIFIED WITHOUT NOTICE

VERNET BEHRINGER
ZAE "Capnord" - BP37 423
13 rue de la Brot - F 21074 DIJON
Tel : +33 (0) 380 732 163
Fax : +33 (0) 380 721 534
www.vernet-behringer.com

LAYOUT	
DRAW BY : P. F.	
DATE : 25-02-21	VERSION : A