


VP-2X 250 12D LINE FRONT VIEW

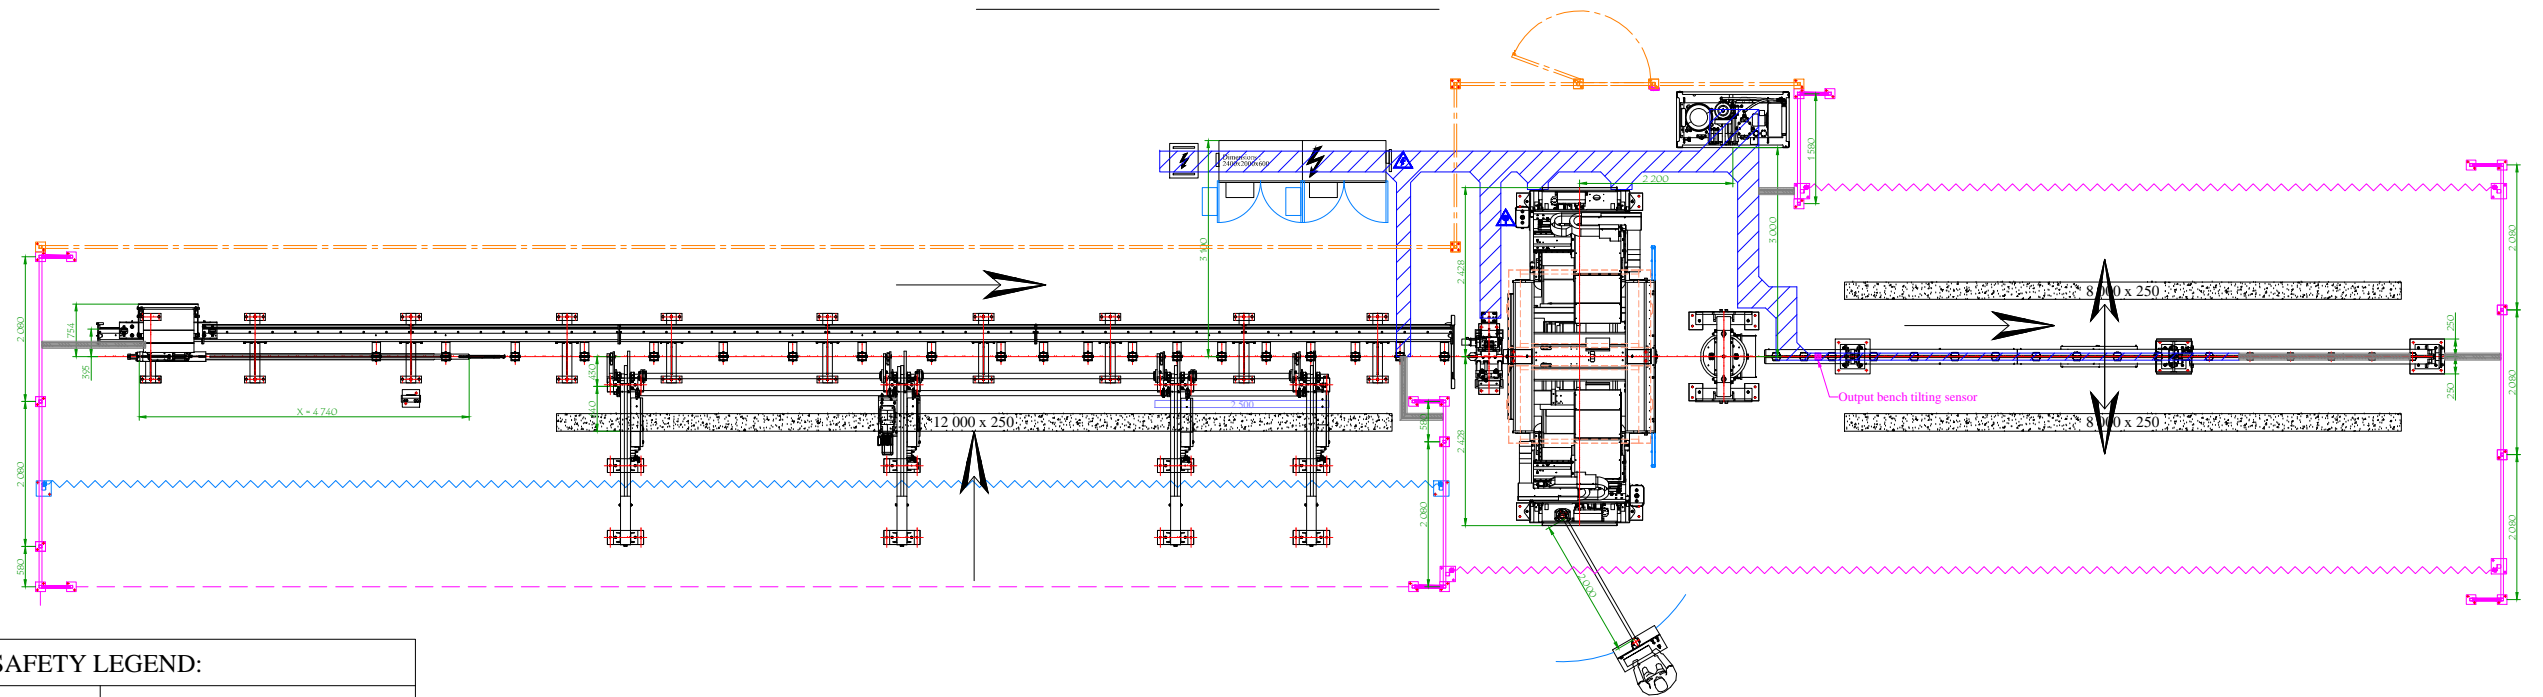

SAFETY LEGEND:

VERNET BEHRINGER SUPPLY:	CUSTOMER SUPPLY
SAFETY FENCE Height 1800 mm (Mesh size 40 x 40 mm). Safety fence KICKSTAND DOOR SAFETY CONTACT LIGHT FENCE Height 400-900 mm. LIGHT FENCE Height 100-600 mm. Total length of safety fences supplied by Vernet Behringer: 15.220 M	SAFETY FENCE Height 1800 mm (Mesh size 40 x 40 mm). DOOR 1080 mm Height 1800 mm (Mesh size 40 x 40 mm). Marking on the ground accompanying light fences Marking on the ground accompanying light fences Marking on the ground or other safety device

REMARKS OR ANNOTATIONS :

GROUND FASTENING
 INPUT BENCH LATERAL SYSTEMS, MACHINE BLOCK, OUTPUT BENCH, AS WELL AS SAFETY DEVICES WILL BE FASTENED TO THE GROUND THANKS TO MECHANICAL DOWEL PINS "HILTI"
 REF: HSA M16/20 x 125 TOTAL QUANTITY : 180.
 REF: HSA M16/20 x 145 TOTAL QUANTITY : 10.
 - TO BE SUPPLIED BY CUSTOMER -

GROUND QUALITY
 GROUND FLATNESS TOLERANCE ± 15 MM. IN CASE OF UPPER DIFFERENCE, CONTACT US
 CONCRETE MINI THICKNESS : 250 MM.
 CONCRETE QUALITY : C20-25 acc. EN 206-1

SUPPLY
 PNEUMATIC INLET 1m³/Hour pressure 6 bars or 6m³/h slack air at normal atmospheric pressure, length out of the ground : 2m.
 ELECTRIC INLET 400V 3 phases + earth 65 kVA, wire out of the ground : 2m.
 Customer is liable for line protection:
 - Overload / Overcurrent / Differential

VP-2X 250 12D
 DESIGN INITIATIVE CAN BE MODIFIED WITHOUT NOTICE
 Scale: 1/50
 CUSTOMER N°:
 CARRIAGE ON THE LEFT
 WORKING LEVEL : 1100 mm
 USABLE LENGTH : 12 M
 OUTPUT BENCH : 8 M

VERNET BEHRINGER

ZAE "Capnoval" - BP97 423
 13 rue de la Brosse - F 21074 DDON
 Tel : +33 (0) 380 723 163
 Fax : +33 (0) 380 721 534
 www.vernet-behringer.com

LAYOUT	
DRAWN BY :	P. F.
DATE :	VERSION :
23-02-15	A